

Directional Pavers

Directional Tactile Pavers

- Made in New Zealand
- Made from high strength concrete
- Excellent anti-slip rating
- Mortar bed required

Directional Tactile Pavers, crafted from robust 50MPa concrete, blend durability and functionality to enhance accessibility. Provides dependable performance and traction in high-traffic outdoor spaces.

Installation guide

Install Directional Pavers to required areas as marked in accordance with manufacturer's recommendations. For the best results we can provide installation.

Types & applications

TP25DI – 25mm thickness. For concrete and asphalt overlays only.

TM40DI – 40mm thickness. For concrete and asphalt surfaces

TX60DI – 60mm thickness. For concrete surfaces. ATCOP recommended.

Compliance



Complies with all relevant NZ standards and regulations including RTS14.2009.

Application

Exterior

Tactile Colours

Yellow. Other colours available on request.

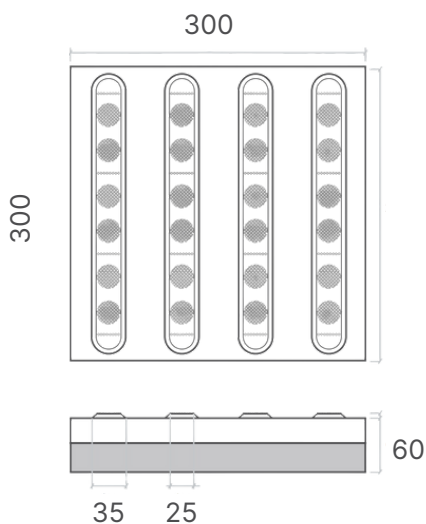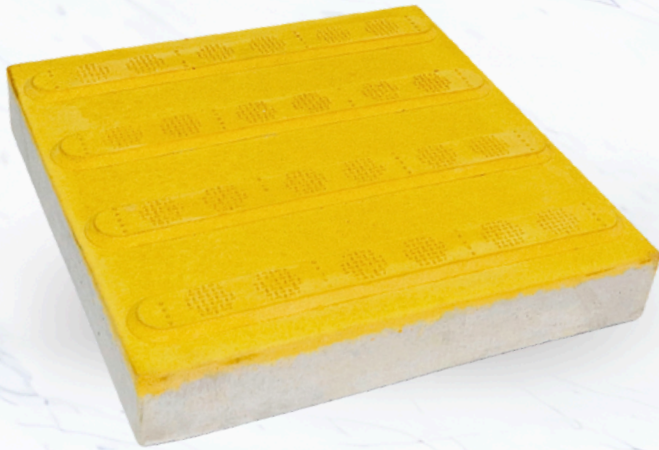

Haptix™ BY CMT GROUP

haptix.co.nz
0800 HAPTIX